


TTL Flash System



Nikon's professional-quality TTL multiple-flash system is designed so that even a novice can use it with confidence right away. Choose any combination of TTL Speedlights with your Nikon F5, F100, FM3A, F80, F75, or F65 camera. Then use the TTL remote or TTL multi-flash sync cord available for TTL off-camera or multi-flash photography. You're all set for off-camera multiple-flash photography — without the strong shadows. You'll be able to create stunning effects and always get perfectly exposed pictures. Plus, there's no need for complicated manual exposure-value calculation or accessory flash meters.

Note: D1-series and D100 digital SLR cameras cannot be used for multiple flash shooting in D-TTL auto flash mode. Multiple flash is possible with these cameras only in manual or Non-TTL auto flash mode.

TTL Flash System Configuration

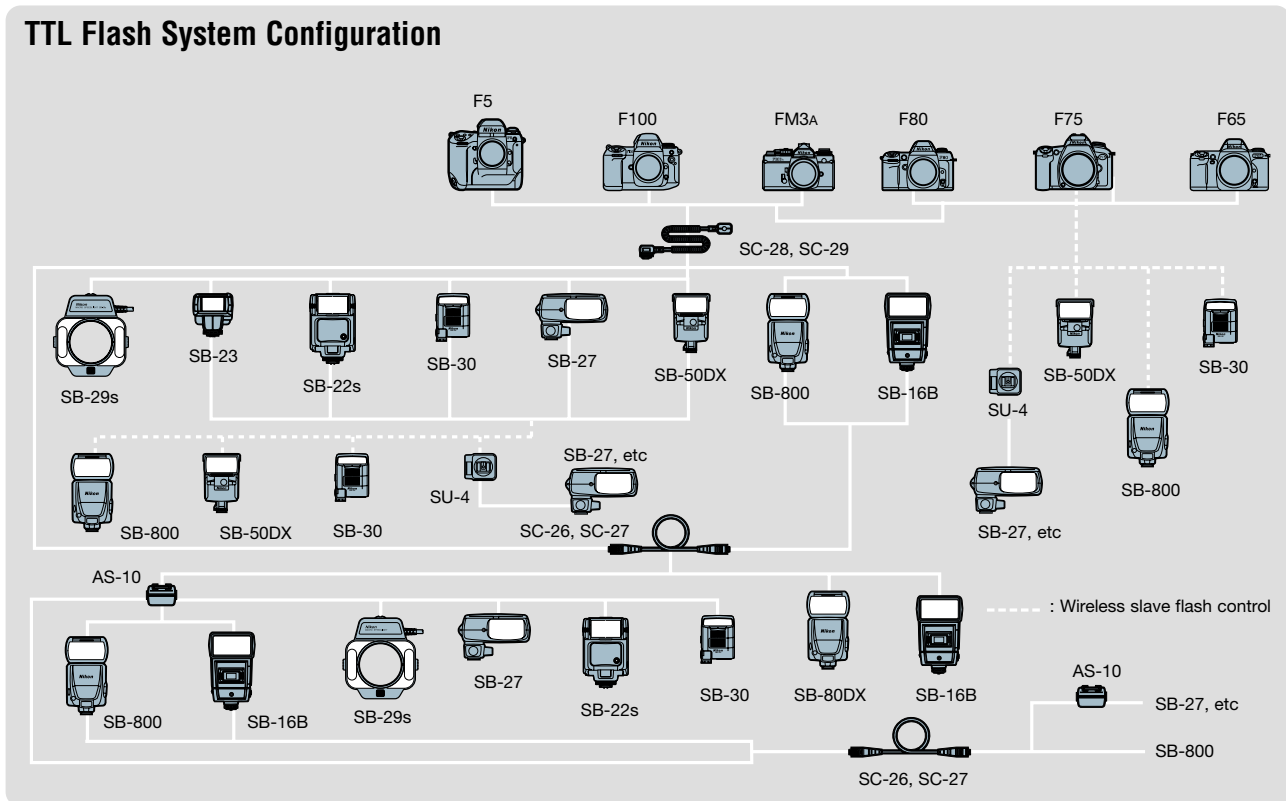

Accessories for TTL Flash System



Wireless Slave Flash Controller SU-4

When connected to a Nikon Speedlight with ISO-type mounting, this enables wireless TTL flash control when using another Nikon Speedlight as a master unit. The provided Diffuser reduces the built-in Speedlight's output, making the slave unit a main flash. (i-TTL/D-TTL operation is not possible.)

Note: You have to cancel the Monitor Pre-flash function before using the SU-4 for wireless slave flash operation.

TTL Remote Cord SC-28/SC-29 (1.5m)

The TTL Remote Cord SC-28/SC-29 comes with two multiple flash terminals, making off-camera TTL flash control easy. With the D2H, the SC-29 also works as an external AF-assist illuminator.

TTL Remote Cord SC-14 (1m)

This cord is convenient for off-camera TTL automatic flash control of the SB-16A or SB-17 with the Nikon F3 series.

TTL Multi-Flash Sync Cord SC-26 (1.5m)/SC-27 (3m)

TTL Multi-Flash Sync Cord SC-26/SC-27 connects TTL flash units to each other through the TTL Multi-Flash Adapter AS-10 or TTL Remote Cord SC-28/SC-29 for multi-flash operation. (i-TTL/D-TTL operation is not possible.)

TTL Remote Cord SC-24 (1.5m)

For TTL flash control when using the Nikon F5 with DW-30 or DW-31 and the Nikon F4 series with DW-20 or DW-21.

TTL Multi-Flash Adapter AS-10

Attach the AS-10 to a Nikon Speedlight such as the SB-800, SB-27, SB-22s, SB-30 or SB-16B. Connect additional TTL Speedlight units with the SC-18 or SC-19. The AS-10, featuring tripod socket, controls up to three TTL Speedlight units.

Specifications and design are subject to change without any notice or obligation on the part of the manufacturer. November 2003

© 1999-2003 NIKON CORPORATION



NIKON CORPORATION

Fuji Bldg., 2-3, Marunouchi 3-chome, Chiyoda-ku,
Tokyo 100-8331, Japan

nikonimaging.com